



FOR ALL YOUR LEISURE ACTIVITIES



INSPIRED BY COMFORT



CFX-50 FRIDGE/FREEZER



WAECO... THE CAMPING
AND OUTDOOR EXPERTS

CONTENTS

WAECO CoolFreeze compact compressor fridge/freezers

P. 3

WAECO **CFX** compressor fridge/freezers

P. 4 - 7

WAECO CF large capacity compressor fridge/freezers

P. 8 - 9

WAECO CF entry level compressor fridge/freezers

P. 10 - 11

WAECO accessories - displays, fridge slides, stands, kits, protective covers, solar panels

P. 12 - 15

WAECO Cool-Ice iceboxes

P. 16

WAECO Bordbar thermoelectric coolers

P. 17

WAECO CoolPro thermoelectric coolers

P. 18 - 19

WAECO & Dometic 3-way absorption coolers

P. 20 - 21

WAECO Mobile energy solutions

P. 22 - 23

Dometic Sanitation solutions

P. 24 - 25

WAECO & Dometic Kitchen solutions

P. 26 - 27

MILENCO Caravan products

P. 28 - 29

Dometic Box awnings

P. 30

WAECO spare parts

P. 31

WAECO CoolFreeze CF

COMPACT FRIDGE/FREEZERS



Up to 50 °C
below ambient
temperature



Suitable
for solar
operation

WAECO CoolFreeze CF-18

Compressor fridge/freezer for refrigeration or deep-freezing



Gross capacity	18 litres
Voltage	12/24 volts DC
Power input	Approx. 35 watts
Average running time	10% at +20 °C ambient temperature 18% at +32 °C ambient temperature both at +5 °C interior temperature
Power consumption	Power input x average running time.
Temperature range	+10 °C to -18 °C, continuously variable via electronic thermostat
Insulation	CFC-free PU foam
System	Compressor with low-voltage protection adjustable for leisure or starter battery by means of a slide switch, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP; lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 11.5 kg
Dimensions (W x H x D)	465 x 414 x 300
Quality features	Detachable fold-up lid, sturdy carrying handle, vertical space for standing 2 litre bottles
Scope of delivery	DC connection cable, folding shelf
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No
CoolFreeze CF-18	CF-18

WAECO CoolFreeze CF-25

Compressor fridge/freezer for refrigeration or deep-freezing



Gross capacity	23 litres
Voltage	12/24 volts DC
Power input	Approx. 35 watts
Average running time	10% at +20 °C ambient temperature 18% at +32 °C ambient temperature both at +5 °C interior temperature
Power consumption	Power input x average running time.
Temperature range	+10 °C to -18 °C, continuously variable via electronic thermostat
Insulation	CFC-free PU foam
System	Secop compressor with low-voltage protection adjustable for leisure or starter battery, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP; lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	12.5 kg
Dimensions (W x H x D)	260 x 425 x 550
Quality features	Detachable lid (lid mount at the front), vertical space for standing 2 litre bottles, interior light
Scope of delivery	DC connection cable, folding shelf

Product	Ref. No
CoolFreeze CF-25	CF-25VERA



WAECO CFX Fridge/freezers

THE NEXT GENERATION PORTABLE FRIDGE

RUGGED FEATURES,
INNOVATIVE DESIGN AND
EXTREMELY POWERFUL
& EFFICIENT COOLING...
PUTTING THE CHILL ON THE
COMPETITION IN THE 2015
INDEPENDENT 12 VOLT
FRIDGE TEST...

TAKING OUT "OVERALL 1ST"

The new **WAECO CFX** fridge/freezer range is the result of many years of research and product development. We have taken your feedback into account to develop a fridge that is tough enough to endure the harshest Australian environments. We know if it will perform there, it will perform anywhere and in any situation.

WAECO CFX provides extreme cooling performance and energy efficiency. All five models have generous internal capacities, combined with substantial insulation thickness all round - lid, sides and bottom. They are equipped with rugged features like strong latches, hinges, drop down handles, and innovative technology such as the new genuine WAECO compressor and upgraded VMSO (Variable Motor Speed Optimisation).

So whether you use it for 4WDing, camping, fishing, for extended holidays enjoying this vast country, or just for a day trip or for the daily chores – with **WAECO CFX**, you can go anywhere!



Purpose built for
Australian conditions



Genuine WAECO
compressor
with integrated
AC electronics



Up to 50 °C
below ambient
temperature



Suitable
for solar
operation

WAECO CFX range of compressor fridge/freezers for refrigeration or deep-freezing with CFX VMSO2 electronics




Class leading WAECO CFX System

- Fully hermetic WAECO ACV20DC compressor with integrated control electronics
- Low voltage protection adjustable for leisure and starter battery via electronic system
- Electronic fuse/automatic reverse pole protection
- Dynamically ventilated wire tube condenser
- Aluminium rollbond evaporator

Unbeatable range of quality features

- Detachable lid
- Interior light
- CFX VMSO2 electronics with soft start and turbo cooler
- USB port
- 4 point M6 nutserts in base

A SIZE TO SUIT YOUR NEEDS



Energy efficient genuine WAECO compressor WITH INTEGRATED AC ELECTRONICS

The genuine WAECO compressor is a result of a significant R&D investment. It has been designed with input from Dometic WAECO engineers in order to fulfil performance requirements based on the Australian climate, usage and road conditions. The WAECO electronics via VMSO2 are matched to support the extreme (-22 °C) capability and also contribute to the power efficiency of the **WAECO CFX**.



VMSO Mk2

VARIABLE MOTOR SPEED OPTIMISATION PROVIDES FAST AND EFFICIENT COOLING OR FREEZING

The unique VMSO Mk2 technology in the **WAECO CFX** range ensures optimal compressor speed according to the set temperature. Building on VMSO first deployed in the WAECO CF range, the upgraded VMSO Mk2 provides an even softer start for the compressor. It now takes the compressor turbo speed to higher RPM than before until set temperature is reached, after which the speed drops back to economy mode. For very cold freezer set temperatures, the compressor remains at turbo speed after the soft start. This technology is extremely effective in all weather conditions, especially when hot. Benefits include even faster and more energy efficient cooling with reduced wear and tear on the compressor.



12/24 volts DC
and
240 volts AC



Suitable for
vehicles with
single battery



Variable
Motor Speed
Optimisation
Mk 2



3 stage
battery
protection



USB
charging
outlet

WAECO CFX-35

Compressor fridge/freezer

WAECO CFX-40

Compressor fridge/freezer




Gross capacity	34.5 litres	41 litres
Voltage	12/24 volts DC and 100 – 240 volts AC	•
Power input (AC 230 V)	Approx. 54 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)	Approx. 56 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating	•
Power consumption (DC 12 V)	Average current draw x running time. Average 0.77 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 0.74 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (Although capable of -22 °C due to energy efficient design, minimum setting of -18 °C recommended for normal usage)	•
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides	•
System	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator	•
Material	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel	•
Colour	Body: pale grey/dark grey; lid: dark grey	•
Weight	17.5 kg	18.5 kg
Dimensions (W x H x D)	398 x 411 x 692	398 x 461 x 692
Quality features	Detachable lid, interior light. CFX VMSO2 electronics with soft start and turbo cooler, USB port, 4 point M6 nuts in base	•
Scope of delivery	DC and AC connection cables, removable wire basket, spring-loaded carrying handles	•

• Standard across range

SEE PAGE 12 FOR
WAECO'S RANGE OF
ACCESSORIES



+
additional 2 year
(parts only)
compressor

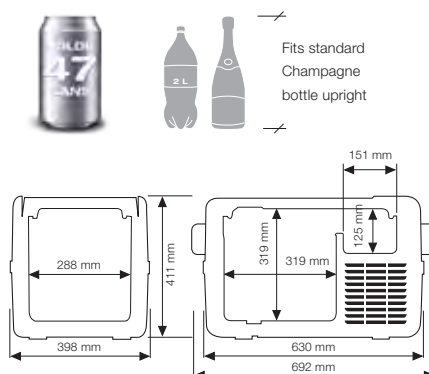


Product

WAECO CFX-35

Ref. No

CFX-35

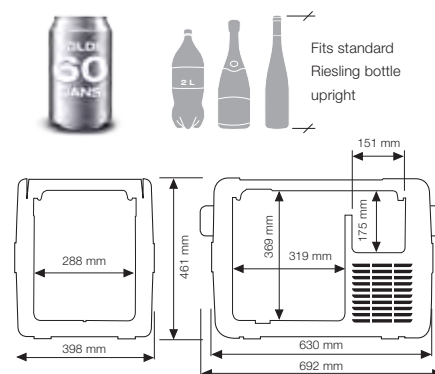

Product

WAECO CFX-35

Ref. No

CFX-40



Purpose built for
Australian conditions



Genuine WAECO
compressor
with integrated
AC electronics



Up to 50 °C
below ambient
temperature



Suitable
for solar
operation

WAECO CFX-50

Compressor fridge/freezer



WAECO CFX-65

Compressor fridge/freezer




WAECO CFX-65DZ

Dual zone compressor fridge and freezer + dairy




50 litres	65 litres	61 litres TOTAL - Fridge: 42 litres, Freezer: 19 litres
•	•	•
Approx. 60 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)	Approx. 65 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)	Approx. 50 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)
•	•	•
Average current draw x running time. Average 0.77 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 0.85 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 1.9 Ah/h (@12 V, -15 °C freezer, 32 °C ambient temperature)
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
20.4 kg	22.3 kg	23.2 kg
455 x 471 x 725	455 x 561 x 725	455 x 561 x 725
•	•	•
•	•	•

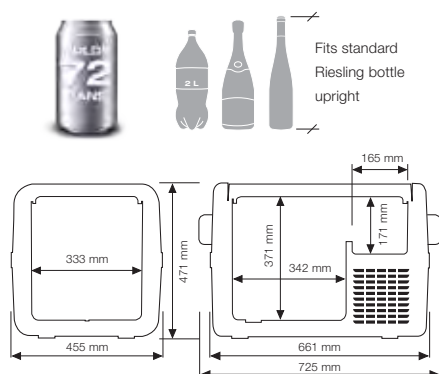


Product
WAECO CFX-50

Ref. No
CFX-50

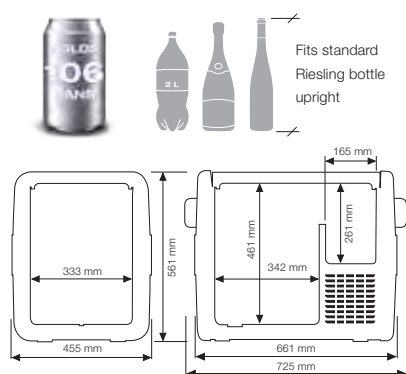


Product
WAECO CFX-65

Ref. No
CFX-65

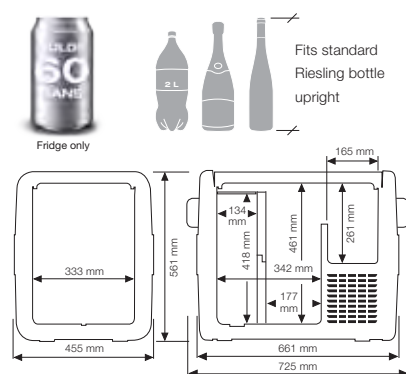

Product
WAECO CFX-65DZ

Ref. No
CFX-65DZ



WAECO CoolFreeze CF

LARGE CAPACITY FRIDGE/FREEZERS

By popular demand, a single zone CF-80 model has been added to the CF range. Whilst the CF-80DZ dual zone configuration model is still available, you can now choose from the single fridge or freezer model, or dual zone model that cools and freezes at the same time.

POWERFUL & DURABLE EVEN AT EXTREME TEMPERATURES


The WAECO CoolFreeze CF-80, CF-80DZ and CF-110 models are designed for Australian conditions, delivering high performance cooling or freezing even in blistering heat, whilst keeping its cool even in areas with high fluctuating temperatures. These models owe their efficiency to the integrated AC and VMSO technology, which is unique to WAECO.

- **Lockable digital control thermostat “Set & Forget”** - Smart electronics do the work for you
- **Built-in battery protection** - No flat batteries
- **No dual battery required** - Suitable for vehicles with a single battery
- **Built-in 240 volt** - No external adapter needed
- **VMSO** (Variable Motor Speed Optimisation) - Faster cooling / Efficiently maintains the temperature / Less wear and tear
- **Flush mounted evaporator plate** - Easy to clean
- **Interior LED light** - Shuts off when the lid is closed
- **Reinforced wire basket with divider** - Easy to stack and protects the evaporator plate

COMPRESSOR TECHNOLOGY

Compressor cooling appliances work with a CFC-free refrigerant that changes from liquid to gas as it flows through the evaporator. In the process the evaporator extracts heat from the refrigeration compartment – it's getting cold. The compressor draws in the gaseous refrigerant, compresses it and passes it on to the condenser. Here, the absorbed heat is released to the atmosphere. The refrigerant changes to the original liquid state and flows back to the evaporator, where the cycle starts again.

- Excellent cooling performance even at extreme outside temperatures
- Refrigeration and deep-freezing
- Minimal power consumption
- Ideal for solar operation



Gross capacity

Voltage

Power input (AC 230 V)

Average running time

Power consumption (DC 12 V)

Temperature range

Insulation

System

Material

Colour

Weight

Dimensions (W x H x D)

Quality features

Scope of delivery

- Standard across range



+
additional 2 year
(parts only)
compressor

WAECO Coolfreeze CF-80

Compressor fridge/freezer with CF VMSO electronics

**WAECO Coolfreeze CF-80DZ**

Compressor dual zone fridge and freezer + dairy with CF VMSO electronics

**WAECO Coolfreeze CF-110**

Compressor fridge/freezer with CF VMSO electronics



80 litres	76.2 litres TOTAL - Fridge: 50.3 litres, Freezer: 25.9 litres	106 litres
12/24 volts DC and 100 – 240 volts AC	•	•
Approx. 65 watts	•	•
	12% at +20 °C ambient temperature 22% at +32 °C ambient temperature both at +5 °C interior temperature	14% at +20 °C ambient temperature 25% at +32 °C ambient temperature both at +5 °C interior temperature
Average current draw x running time. Average 2.0 Ah/h (@12 V, 5 °C interior, 32 °C ambient temp)	Average current draw x running time. Average 2.9 Ah/h (@12 V, 5 °C fridge, -15 °C (approx.) freezer 32 °C ambient temp)	Average current draw x running time. Average 2.1 Ah/h (@12 V, 5 °C interior, 32 °C ambient temp)
+10 °C to -18 °C, free temp setting via elec thermostat with digital temp readout	•	•
CFC-free PU foam	•	•
Secop compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated fin condenser, aluminium rollbond evaporator	•	•
Cabinet: coated sheet steel, top and base: PP, lid: PE	•	•
Body: pale grey/dark grey, lid: pale grey	•	•
29 kg	29 kg	32 kg
790 x 455 x 500 mm (W940 incl. handles)	790 x 455 x 500 mm (W940 incl. handles)	790 x 555 x 500 mm (W940 incl. handles)
Detachable lid (screw-on lid mount, variable left/right), sturdy latches and hinges, interior light, vertical space for 2 litre bottles. CF special electronics with soft start and turbo cooler	•	•
DC and AC connection cables, removable wire basket, detachable carrying handles	•	•



Product	Ref. No
WAECO CF-80 Single zone	CF-80ACVERB1



Product	Ref. No
WAECO CF-80 Dual zone	CF-80ACDZVERB



Product	Ref. No
CoolFreeze CF-110	CF-110AC VERB



Variable Motor Speed Optimisation

WAECO CoolFreeze

ENTRY LEVEL PORTABLE COMPRESSOR FRIDGE/FREEZERS

The WAECO CoolFreeze range are entry level compressor fridge/freezers designed to get the job done while delivering excellent cooling or freezing performance.

Check out the Packs for additional added value as standard with the CDF-35, CF40 & CF50.



WAECO CDF-11



Tough quality zippers



EPS-817, 240 mains adaptor included in the CDF-35 pack



WAECO CF40 - Mans best friend


WAECO CoolFreeze CDF-11

Portable compressor fridge/freezer for refrigeration or freezing.



Gross capacity	10.5 litres
Voltage	12/24 volts DC
Power input (AC 230 V)	Approx. 30 watts
Power consumption (DC 12 V)	-
Temperature range	+10 °C to -18 °C, cont. variable via electronic thermostat
Insulation	CFC-free PU foam
System	Compressor with integrated control electronics, low voltage protection (can be adjusted), electronic fuse/automatic reverse pole protection
Material	Housing and lid PP
Colour	Pale grey/dark grey
Weight	8.8 kg
Dimensions (W x H x D)	540 x 358 x 235 mm
Quality features	Extremely compact design, Electronic thermostat with digital temperature display, 3-stage battery monitor, LED interior light, adjustable shoulder strap, two drink holders, easy and secure fastening with the vehicle safety belt
Scope of delivery	DC connection cable, carry strap

- Standard across range



Product

CoolFreeze CDF-11

Ref. No

CDF-11



Up to 50 °C
below ambient
temperature



Suitable
for solar
operation

WAECO CoolFreeze CDF35 PACK

Portable compressor fridge/freezer for refrigeration or freezing.

**WAECO CoolFreeze CF40 PACK**

Portable compressor fridge/freezer for refrigeration or freezing.

CF40 + Insulated protective cover **CB-CF40**

**WAECO CoolFreeze CF50 PACK**

Portable compressor fridge/freezer for refrigeration or freezing.

CF50 + Insulated protective cover **CB-CF50**




31 litres	37 litres	49 litres
12/24 volts DC + 240 volts AC (AC Adapter included)	12/24 volts DC	•
-	approx. 45 watts	•
-	Power input x average running time. Average 0.87amps/hr (@12 V, 5°C interior, 32°C ambient temperature)	•
+5 °C to -15 °C	+10°C to -18°C, free temperature setting via electronic thermostat with digital temperature readout	•
•	•	•
•	Secop compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator	•
•	•	•
•	•	•
15 kg	17 kg	19 kg
340 x 380 x 560 mm	360 x 445 x 580 mm	630 x 480 x 360 mm
Detachable lid (lid mount at the front)	Detachable lid (lid mount at the front), interior light, vertical space for standing 1.5 litre bottles.	Detachable lid (lid mount at the front), interior light, vertical space for standing 1.5 litre bottles.
DC connection cable, EPS-817 adapter & CB-CDF35 insulated protective cover	DC and AC connection cables, removable wire basket, detachable carrying handles, CB-CF40 insulated protective cover	DC and AC connection cables, removable wire basket, detachable carrying handles, CB-CF50 insulated protective cover



CDF-35


Insulated protective cover **CB-CDF35**

Mains adapter 240 ≥ 12 volts

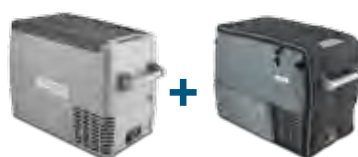

CF40

Insulated protective cover **CB-CF40**

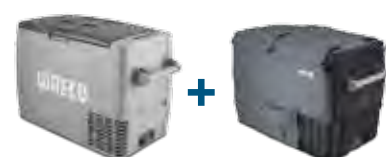

CF50

Insulated protective cover **CB-CF50**



Product	Ref. No
CoolFreeze CDF35	CDF35 PACK

Product	Ref. No
CoolFreeze CF40 Pack	CF40 PACK

Product	Ref. No
CoolFreeze CF50 Pack	CF50 PACK



Up to 45 °C below ambient temperature



Suitable for solar operation



Up to 50 °C below ambient temperature



Suitable for solar operation



Up to 50 °C below ambient temperature



Suitable for solar operation

WAECO ACCESSORIES

RANGE OF GENUINE WAECO ACCESSORIES

Does the need for outdoor adventure take you over rough terrain at times? Go ahead, as the insulated protective cover allows your fridge/freezer to take on any challenge. The cover protects from moisture, dust and dirt. It also provides effective insulation, improving the cooling capacity and therefore the energy consumption even further.



Suits **CFX-50**



Phone pocket next to CFX USB output



Direct access to controls



Practical pockets



Suits **CFX-35**



Suits **CFX-40**



Suits **CFX-65 & CFX-65DZ**

Product	Ref. No
WAECO CFX-35 Insulated protective cover	CFX-IC35
WAECO CFX-40 Insulated protective cover	CFX-IC40
WAECO CFX-50 Insulated protective cover	CFX-IC50
WAECO CFX-65 Insulated protective cover	CFX-IC65

WAECO CFX INSULATED PROTECTIVE COVERS

BENEFITS OF PROTECTIVE COVERS

Protects against heat

- Extra insulation against strong sunshine or extreme outside temperatures
- Saves battery power, improves overall efficiency

Protects against excessive movement

- Eyelets for securing your fridge firmly in a vehicle

Practical features

- Top flap split to suit reversible lid opening on **CFX-50, CFX-65 & CFX-65DZ**
- Top flap swings open with lid on **CFX-35 & CFX-40**
- Open panels for handles and connection plugs
- Protects against dirt, dust & sand. Keeps your fridge like new in harsh Australian conditions
- Protects against moisture and water splashes For use on yachts, boats or open vehicles

Materials

- Sides and top made from high quality silver-grey Oxford nylon fabric
- Bottom and ends made from hard-wearing rubber coated nylon
- Interior insulation lining of aluminium coated polyester
- Sturdy zips for easy fitment

Weight

- 1.5 to 2 kg



WAECO CF & CDF PROTECTIVE COVERS



CB-CF18



CB-CF25



CB-CF80



CB-CF110



CB-CDF35

Product	Ref. No
CoolFreeze CB-CF18	AC-CB-CF18
CoolFreeze CB-CF25	AC-CB-CF25
CoolFreeze CB-CF80	AC-CB-CF80
CoolFreeze CB-CF110	AC-CB-CF110
CoolFreeze CB-CDF35	AC-CB-CDF35

Material

- Outside: High-quality silver-grey Oxford nylon, lid and base in robust, rubber coated, black nylon. Inside: Aluminium coated polyester

Colour

- Sides: Silver grey. Lid and base: Black

Quality features

- Detachable lid and base, outside pockets to store small items, four fixing rings to secure safely in the vehicle



WAECO CFX

IN-VEHICLE INSTALLATION SOLUTIONS

If you are travelling on corrugated roads, having your fridge restrained with a fixing kit is a safe option and helps the fridge travel with the suspension of the vehicle. The accessories range also features fridge slides, for more convenient access to the fridge in your vehicle.



WAECO CFX Fixing kit

Suits all CFX (Also suits CF-35, CF-40, CF-50, CF-50DZ, CF-60, CF-80, CF-80DZ, & CF-110)

Weight	0.8 kg
Quality features	4-point fixing for reliable restraint, low profile tie-down anchor points. Strong metal D-ring folds down when not in use. Fixing hardware includes nylon insert shake proof nuts, heavy duty straps and quick release buckles
Product	Ref. No
WAECO CFX Fixing kit	CFX-UFK



WAECO CFX Fridge slides

CFX-SLD 35/40

Suits: CFX-35 & CFX-40

(Also suits CF-35, CF-40, CF-50, CF-50DZ & CF-60)

CFX-SLD 50/65

Suits: CFX-50, CFX-65 & CFX-65DZ

WAECO CF Fridge slide

Suits: CF-80, CF-80DZ & CF-110

For fastening of WAECO CoolFreeze coolers in vehicles and for convenient loading and unloading.



Material/Colour	Powder coated metal/grey	•	•
Weight	16.5 kg	17 kg	19.4 kg
Dimensions Internal (W x D)	401 x 740 mm	458 x 740 mm	520 x 888 mm
External (W x H x D)	459 x 79 x 760 mm	516 x 79 x 760 mm	581 x 79 x 910 mm
Extended (D)	1420 mm	1420 mm	1660 mm
Quality features	→ 100 kg max. load capability → 4 x heavy duty straps, 4 x quick release buckles, → 4 x M6 x 16 screws & washers are included in the set → Two sets of mounting holes: 1: To suit feet in base of CFX (CFX-SLD-35/40 also fits CF-35/40/50/50DZ/60) for quick fitment 2: To match M6 thread nuts in base of CFX for semi-permanent installation		
Product	WAECO CFX Fridge slide 35/40	WAECO CFX Fridge slide 50/65	Fridge slide for CF-80/110
Ref. No	CFX-SLD3540	CFX-SLD5065	AC-SLD-110

WAECO CFX WIRELESS DISPLAY



Suits all CFX models

The wireless display shows the internal temperature of the fridge from a distance. It also shows the voltage protection level set, and has adjustable alarm limits that enable an audible warning if the temperature rises or the battery gets low.

- Wireless operation (2.4GHz) - range up to 15 m
- Displays: fridge temperature, fridge power source, battery protection setting, alarm setting
- Temperature alarm setting - 2 levels, audible & visual alarm
- Backlit display (when 12/24 V DC connected)
- Dual power source: AAA batteries (included)
- 1.8 m lead/cigarette & plug 12/24 volt


Dimensions (W x H x D)	66 x 85 x 23 mm
Weight	0.1 kg
Product	Ref. No
WAECO CFX Wireless display	CFX-WD



WAECO CoolFreeze Fridge stand

Portable fridge stand

2 height positions	H450 x D330 mm & H310 x D450 mm (± 20 mm).
Quality features	Strong aluminium frame, folds up easily and compact, one adjustable foot, supports up to 80 kg, comes with storage bag
Product	Ref. No
CoolFreeze Fridge Stand	AC-FridgeStand

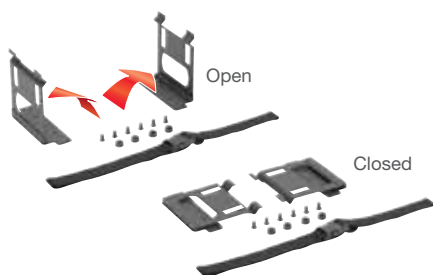

WAECO Universal fixing kit

For CDF-35/CF-25/CF-35/CF-40/CF-50/CF-60/CF-50DZ in vehicles.

Material	Powder coated metal
Colour	Black
Scope of delivery	Two frame sections, adjustable strap with snap lock, set of screws
Product	Ref. No
Universal fixing kit for CDF-35 / 45 / CF-25 / 35 / 40 / 50 / 60 / 50DZ	AC-UFK

WAECO CoolPower RAPS12R-U2

12 volt fridge power wiring kit - heavy duty to suit all WAECO compressor fridge/freezers

Highly recommended for replacement of standard vehicle cigarette lighter sockets which are often inadequate to properly run fridges due to thin wiring and associated voltage drops. One kit does all. This truly universal unit is packed with the following features:

- Compact design for internal mounting in the rear of vehicle
- 6 metres of heavy duty 6 mm cable
- Switchable between constant power for running portable fridge and on/off with engine for battery charging
- Even in "constant power" mode, cuts out at very low vehicle battery voltage to protect the battery
- Choice of socket-heavy duty hellra style and cigarette type both built in
- Fuse and installation kit with snap action mounting plate included

Product	Ref. No
CoolPower RAPS12R-U2	RAPS12R-U2



COOLPOWER BATTERY SOLUTIONS



WAECO CoolPower RAPS36

WAECO battery pack for compressor fridge/freezers

- Heavy duty 12 volt remote power.
- Dimensions: **W**230 x **H**245 x **D**227 mm
- Weight: 13.6 kg
- Genuine deep-cycle AGM battery cells
- Cigarette and hella output sockets
- Digital volts display
- Battery condition LED's/test button
- Secure screw connection charging socket
- 1.5 m charging lead
- 36 amp hours
- Maximum charging current: 14.4 A
- Built-in charging posts for charging via optional 240 volts to DC charger

Product	Ref. No
---------	---------

CoolPower RAPS36	RAPS36
------------------	--------



WAECO CoolPower RAPS72 KIT

Cradle for two battery packs

Get twice the convenience of remote battery power with the RAPS 72 KIT. Combines two CoolPower 36 batteries to provide a generous 72 amp hours of power for those longer stays. Ideal for your CF-80 or CF-110 fridge.

- Sturdy powder coated steel cradle
- Positive location lugs
- Connection lead

Product	Ref. No
---------	---------

CoolPower RAP72 KIT	RAPS72KIT
---------------------	-----------



* Kit only, batteries not included.

WAECO SOLAR POWER



WAECO Portable solar PS80 and PS120

Portable folding solar panel kit - 12 volt, PS80: 80 watt, PS120: 120 watt

WAECO solar panels are an alternative power source you can use to charge your batteries. They have an inbuilt 10 amp heavy duty voltage regulator and have adjustable feet so that you can direct them towards the sun throughout the day and come in 80 and 120 watt sizes.

- High performance monocrystalline silicon
- 12 volt, 10 amp heavy duty regulator
- Battery temperature sensor
- 5 m lead with alligator clips and anderson plug connector
- Adjustable feet - for optimum angle to the sun
- Folds up easily and compact
- Comes with protective carry bag



PS80

PS120

	PS80	PS120
Dimensions Folded W x H x D	534 x 544 x 70 mm	534 x 754 x 70 mm
Weight	11.3 kg (Inc. cables and carry bag)	14 kg (Inc. cables and carry bag)
Max power output	4.6 amps	6.9 amps

Product	Ref. No
---------	---------

Portable solar PS80	PS80
Portable solar PS120	PS120





WAECO COOL-ICE

ROTOMOULDED ICEBOXES


WAECO Cool-Ice iceboxes will keep your ice frozen for days and are perfect for the BBQ, the picnic, around the pool or even on a camping trip. WAECO Cool-Ice iceboxes hold large amounts of ice and frozen goods for long periods and are ideal for continuous exposure to weather, especially on boats. Also for use in trucks, camping areas, BBQs, poolside, sports games and outdoor parties.

- Designed for optimal performance / weight / volume balance
- Strong, ergonomic polyethylene handles (WCI-42 and up)
- Integrated polyethylene feet & large diameter drain plug
- Thick polyurethane refrigeration grade foam insulation
- Strong nylon latches with stainless steel fixing screws
- Fully integrated hinges with stainless steel rods
- Strong, seamless, UV stabilised/food grade polyethylene CFC free construction
- Lightweight, hygienic & easy to clean
- Extremely low heat absorption
- Integrated tie-down points
- Largest service network and 5 year warranty Australia wide



Labyrinth seal design

Food quality gasket recessed into a channel in the lid. When the lid is closed the adjacent dike in the lid combined with the raised tongue on the box collar creates a highly efficient labyrinth seal against external ambient hot air.

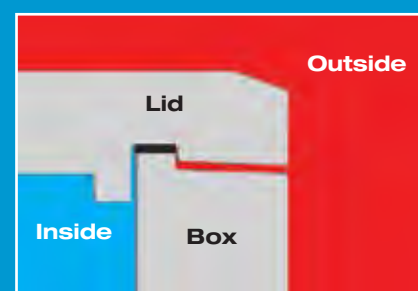

KEEP ICE FOR
UP TO 10 DAYS*

Model	Capacity (litres)	Dimensions (W x H x D)	Weight (kg)
WCI-13	13	388 x 305 x 245 mm	2.8
WCI-22	22	388 x 313 x 365 mm	4.2
WCI-42	41	635 x 337 x 390 mm	7.5
WCI-55	55	565 x 420 x 485 mm	9.3
WCI-70	68	685 x 420 x 485 mm	10.4
WCI-85	87	835 x 435 x 495 mm	13.1
WCI-85W	86	835 x 435 x 495 mm	13.5
WCI-110	111	1050 x 440 x 510 mm	15.7

* Ice will last from 3 to 10 days depending on usage and conditions. Visit www.waeco.com.au for further details.

A SIZE FOR EVERYONE



WCI-13



WCI-22



WCI-42



WCI-55



WCI-70



WCI-85



WCI-85W



WCI-110

WAECO BORDBAR THERMOELECTRIC COOLERS

LOW-COST, LIGHT-WEIGHT, VERSATILE

Thanks to their light weight, thermoelectric coolers are particularly easy to carry and transport. Their cooling capacity of up to 20 °C below the ambient temperature is sufficient for most purposes, including car journeys, camping or picnics.

WAECO's range of thermoelectric coolers utilise wear and maintenance free technology and can be used for both cooling and heating. They are cost-efficient, reliable and are the perfect sized portable coolers.

WAECO BordBar TB-08G

Thermoelectric cooler/warmer with carry strap.

WAECO BordBar TB-15G

Thermoelectric cooler/warmer



Gross capacity	Approx. 8 litres	Approx. 15 litres
Power source	12 volts	12 volts
Weight	Approx. 3.2 kg	Approx. 5.2 kg
Dimensions (W x H x D)	200 x 298 x 442 mm	282 x 328 x 462 mm
Cooling capacity	Up to 20 °C below ambient	•
Warming capacity	Up to 55 °C	Up to 65 °C
• Standard across range		

Product	BordBar TB-08G	BordBar TB-15G
Ref. No	TB-08G	TB-15G



Up to 20 °C
below ambient
temperature



Up to 55 °C
in the
heating mode



Up to 20 °C
below ambient
temperature



Up to 65 °C
in the
heating mode



WAECO COOLPRO THERMOELECTRIC COOLERS

HIGH-TECH COOLERS WITH DC/AC AND SPECIAL ELECTRONICS

Mobility, performance and convenience – these are the hallmarks of the WAECO CoolPro series. State-of-the-art thermoelectrics make for outstanding cooling results up to 30 °C below the ambient temperature. Add to this all the useful features and functions: 12/24/240 volts DC/AC as standard, individual temperature regulation with LED display and memory function, plus more. At the touch of a button the coolers (+1 °C to +15 °C) can be turned into warmer boxes (+50 °C to +65 °C). WAECO CoolPro – the comfort class of thermoelectric refrigeration.

PERFECT
DOWN TO
THE LAST
DETAIL



PRODUCT BENEFITS OF THE COOLPRO SERIES

- **Highly effective insulation** - Outstanding performance efficiency
- **Dynamic interior ventilation** - Significantly improved cooling performance
- **Brushless motor fans** - Long service life
- **Intelligent power-save circuit** - Electronics switch automatically to power-save mode once the desired interior temperature has been reached
- **12/24/240 volts as standard** - With priority circuit for 240 volts
- **Heat exchanger and high-performance Peltier element** - Cooling performance up to 30 °C below ambient temperature
- **Magnetic switch** - Switches the interior fan off when you open the cooler
- **Universal fixing kit** - (optional for TC-14FL and TC-21FL)



Gross capacity

Voltage

Power consumption (DC 12 V)

Average running time

Temperature range

Insulation

System

Material

Colour

Weight

Dimensions (W x H x D)

Quality features

Test marks

- Standard across range



WAECO CoolPro TC-14FL

Thermoelectric cooler/warmer with TC special electronics

**WAECO CoolPro TC-21FL**




Thermoelectric cooler/warmer with TC special electronics

**WAECO CoolPro TC-35FL**

Thermoelectric cooler/warmer with TC special electronics



Approx. 14 litres	Approx. 21 litres	Approx. 35 litres
12/24 volts DC and 240 volts AC	•	•
Approx. 55 watts at 12 volts DC Approx. 60 watts at 24 volts DC Approx. 80 watts at 240 volts AC	•	•
30% at +20 °C ambient temperature	32% at +20 °C ambient temperature	35% at +20 °C ambient temperature
Cooling: +1 °C to +15 °C (up to 30 °C below ambient temperature); Heating: +50 °C to +65 °C	•	•
Polyurethane full-foam insulation	•	•
Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless motor fan	•	•
Sturdy injection moulded parts	•	•
Dark grey/pale grey	•	•
Approx. 5 kg	Approx. 6 kg	Approx. 10 kg
303 x 328 x 450	303 x 420 x 450 mm	376 x 460 x 550 mm
TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with magnetic closure, sturdy, fold-away handle	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider
CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)	•	•

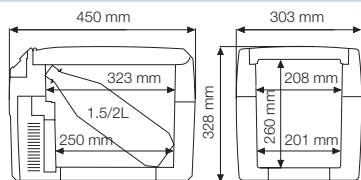

Product	Ref. No
CoolPro TC-14FL	TC-14FL
Optional extras	
Universal fixing kit	UFK-T
Low voltage protector	AC-M50K

Product	Ref. No
CoolPro TC-21FL	TC-21FL
Optional extras	
Universal fixing kit	UFK-T
Low voltage protector	AC-M50K

Product	Ref. No
CoolPro TC-35FL	TC-35FL
Optional extras	
Low voltage protector	AC-M50K






3-WAY ABSORPTION COOLERS

COOLING WITH 12 VOLT, 240 VOLTS & LPG

Silent and truly mobile, absorption coolers give camping enthusiasts all the freedom they need. Gas operation in a remote field, convenient 240 volt hook-up at the campsite, power supply from the 12 volt socket in cars or motorhomes – anything is possible! Switch-over from one energy mode to another in a jiffy! Whether LPG, 12 or 240 volts, the refrigeration system adjusts to suit your needs – Cooler and fridge/freezer models available.

HOW ABSORPTION COOLING WORKS

A solution of ammonia and water are heated in the boiler causing the ammonia to be driven off as a vapour. The vapour is condensed to liquid and fed into the evaporator where it combines with hydrogen and evaporates, thereby digesting heat. The mixture of ammonia and hydrogen then passes through the absorber where the ammonia is absorbed back into the water. The re-combined water and ammonia is then returned to the boiler so the process can continue.

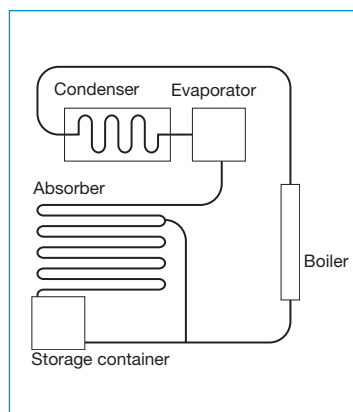

WAECO CoolFun CA-35

Entry level absorption cooler for 12 volts, 240 volts and LPG



DOMETIC RC1180

Absorption fridge and freezer for 12 volts, 240 volts and LPG



Gross capacity	Approx. 35 litres	Approx. 30 litres fridge, 16 litres freezer
Power source	240 volts AC/72 watt 12 volts DC/72 watt LPG/12g/h	240 volts AC/120 watt 12 volts DC/120 W, LPG/19 g/h
Material	Solid CFC-free polyurethane foam	Tough rotomoulded cabinet
Colour	Silver/grey	Blue
Weight	19.5 kg	26 kg
Dimensions (W x H x D)	520 x 454 x 515 mm	640 x 520 x 520 mm
Quality features	Controller for gas and power operation, recessed side grips for convenient transport, lid with round rubber sealing and extra magnetic latch, evaporator with recess for ice cube tray	Piezo ignition, thermostat regulation in 240 volt and gas modes, continuous running on 12 volt. Removable divider – also operates as 50 litre fridge.

Product

Ref. No



CoolFun CA-35

CA-35


Product

Ref. No



Dometic RC1180

RC1180

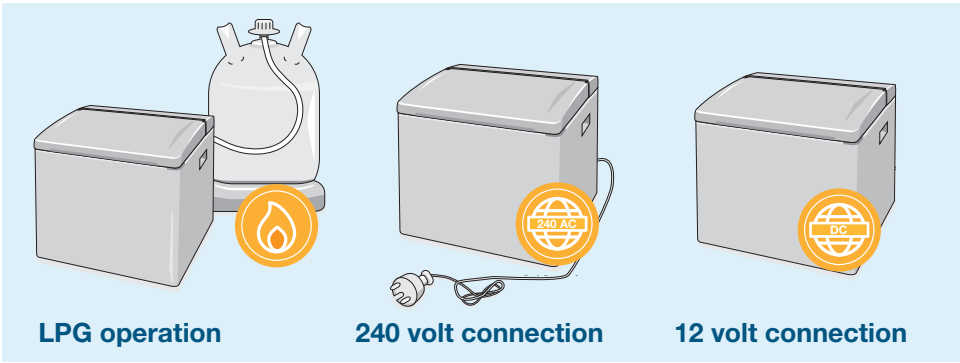

CA-35 Ice tray



CA-35 12 & 240 volt



CA-35 gas connection



CA-35 always the life of the party



12/24 volts DC
and
240 volts AC



Gas



Up to 25 °C
below ambient
temperature



Refrigerator
& freezer

WAECO MOBILE ENERGY SOLUTIONS

POWER SUPPLY TO VOLTAGE CONVERTERS



Enjoy the comforts of home even when you are away with WAECO's family of 240 volt adapters and inverters.

Ideal for running your 12 volt WAECO fridge on 240 volt mains, laptops and other low power products on 12 volt from your vehicle and batteries.

WAECO inverters generate 240 volts:




WAECO CoolPower EPS-817

240 volt adapter

240 volts mains connection, 12 volt 6 amp

Required for the connection of listed DC compressor driven fridge/freezers. Suitable also for all other 12 volt thermoelectric coolers or as a universal power unit via the integrated cigarette lighter socket. Ideal for use at home, in the hotel, at the campsite, in the weekend home, etc.



WAECO CoolPower MPS-50

240 volt adapter

For problem free connection to 110 to 240 volt mains systems. Suitable for all WAECO compressor models.



Input voltage	240 volts AC/50 Hz	110 to 240 volts AC
Output voltage	13 volts DC	27 volts DC
Continuous load	6 amps	6 amps
Output power	72 watts	150 watts
Dimensions (W x H x D)	115 x 65 x 170 mm	120 x 70 x 200 mm
Weight	0.6 kg	Approx. 1 kg
Battery voltage	-	12/24 volts DC
Quality features	-	Switch mode, automatic priority for mains operation
Suitable for	Suits all thermoelectric coolers and following compressor models: Current models: CDF-11, CDF-35, CF-18, CF-25VERA, CD-30, CU-80 series Old models: CF-35DC to CF-60DC, CDF-45	All compressor models



Product	Ref. No	Product	Ref. No
CoolPower EPS-817	AC-EPS817A	CoolPower MPS-50	MPS-50A





WAECO PerfectPower MCI-150-12

12 volts to 240 volts inverter

Quality features

- Convenient fit in vehicle cup holder
- Mobile energy for 240 volt low-power consumers
- USB output as standard
- Light-weight, round and super-compact
- Thermal overload protection, electronic short circuit protection & automatic low voltage shutdown.



Input voltage	12 volts DC (10 to 15 volts)
Output voltage	240 volts AC
Curve	modified sine wave 
Output frequency	50 ± 2 Hz
Full load current input	15 amps
Peak/continuous power	250/150 watts
Maximum ambient temperature	50 °C ± 5 °C
Weight	490 g
Dimensions	Ø66 x L173 mm

Product	Ref. No
PerfectPower CanSize Inverter	MCI-150-12



WAECO PerfectPower PP RANGE

Modified sine wave inverters turn 12 volt battery voltage into 240 volt AC.

Quality features

- Surge and short-circuit-proof
- Reverse polarity protection by means of replaceable fuse
- Can be activated/deactivated using external switch
- Individually adjustable clip on mounts
- High and low voltage shutdown, polarity protection fuse
- PP 152 with cigarette lighter plug

PP152



PP402



PP602



Input voltage	12 volt DC (10 - 15 volt)	•	•
Output voltage/curve	210 – 240 volt AC/modified sine wave	•	•
Output frequency	50 Hz	•	•
Input current at no load	< 0.25 amp	•	•
Efficiency	up to 90%	•	•
Continuous power	150 watts	350 watts	550 watts
Peak power	350 watts	700 watts	1100 watts
Dimensions (W x H x D)	101* x 71 x 171 mm * 129 mm including foot mounts	101* x 71 x 192 mm * 129 mm including foot mounts	101* x 71 x 223 mm * 129 mm including foot mounts
Weight	0.84 kg	0.99 kg	1.4 kg

• Standard across range

Product	PerfectPower PP 152 150W	PerfectPower PP 402 350W	PerfectPower PP 602 550W
Ref. No	PP152	PP402	PP602



DOMETIC SANITATION

HOME LIKE COMFORT

Small, but a big performer!

Handy and space saving, the 970 series adds hygienic comfort to your recreational vehicle or when enjoying the outdoors.

Many sensible functions are contained in the smallest possible space to ensure you can enjoy home like comfort when travelling.



DOMETIC 976

DOMETIC 972

DOMETIC 970 Series

Space saving portable toilets with 360° pressurised flush.

- Ingenious disposal system: extra long, pivoting spout and vent openings for clean, splash-free discharge

→ 8.7 litre flush water tank – sufficient for 27 flushes

→ Useful accessories: spare tanks, fixing kit
- Safety through overflow protection and tank level indicator

→ Push button control for powerful flushing with less pumping

→ Extra strong 360° pressure flush for effective cleaning

→ Portable toilet in two sizes

	SANIPOTTIE 972	SANIPOTTIE 976
Flush water tank capacity	8.7 litres	8.7 litres
Waste tank capacity	9.8 litres	18.9 litres
Material	ABS	ABS
Colour	White / grey	White / grey
Dimensions (W x H x D)	342 x 312 x 390 mm	342 x 385 x 390 mm
Weight	5.4 kg	5.9 kg

Product	DOMETIC 972	DOMETIC 976
Ref. No	301097206	301097606

Fixing kit

For easy and safe installation



Product	Ref. No
Fixing kit for 970 series	385320005

Build up air pressure

Pull out handle

Push once

Convenient discharge

THE UNIQUE DOMETIC CARE HYGIENE SYSTEM

FOR YOUR MOBILE TOILET

The Dometic Care product range is synonymous with cleanliness in every micro pore and the result of innovative research. Perfectly compatible products for the removal of stains and toilet odours – as effective as necessary, as gentle on the environment as possible and completely user friendly in the process.



**NEW
RELEASE**



DOMETIC PowerCare

Highly effective additive for the waste holding tank. Breaks down waste and prevents unpleasant odours.

- Packed in soluble film
- Just 1 tab per full tank
- For all portable toilets
- Space-saving packaging
- Content: 16 tabs

Product	Ref. No
DOMETIC POWER CARE TABS	9107200149

DOMETIC GreenCare

Highly effective environmentally friendly tab for the waste holding tank. Breaks down waste and prevents unpleasant odours.

- Powerful and environmentally friendly
- Packed in soluble film
- Just 1 tab per full tank
- For all portable toilets
- Space-saving packaging
- Content: 16 tabs

Product	Ref. No
DOMETIC GREEN CARE TABS	9107200150



DOMETIC ExtraCare

Fluid additive for the flush water tank. Can be used on its own or in combination with other Dometic sanitation products.

- Cleans and protects
- Protects the rubber seals
- Creates a smoother flush
- Prevents stains and scaling
- Reduces the build-up of scale
- Integrated deodoriser adds a pleasant fragrance
- Micro-thin protective layer facilitates cleaning of the toilet bowl



DOMETIC PowerCare

Highly effective fluid additive for the waste holding tanks. Breaks down waste into liquid and prevents unpleasant odours.

- Indispensable for winter campers
- Simple dosing with measuring strip
- Remains effective after freezing and thawing
- Breaks down waste to facilitate disposal
- Prevents the emergence of gas and unpleasant odours in the holding tank



DOMETIC SpecialCare

Ecologically compatible fluid additive for the waste holding tanks. Waste can be disposed at almost every campsite.

- Pleasant, fresh scent
- Outstanding odour protection
- Facilitates waste storage and discharge
- Remains effective after freezing and thawing
- Eco-friendly – awarded with ecological hallmark

Product	Ref. No
DOMETIC ExtraCare, 1.5 litre	9107200001

Product	Ref. No
DOMETIC PowerCare, 1.5 litre	9107200002

Product	Ref. No
DOMETIC SpecialCare, 1.5 litre	9107200003

KITCHEN SOLUTIONS



WAECO PowerVac PV-100

The handy vacuum cleaner comes complete with integrated battery – no need for an external power supply. It is strong enough to get rid of ground-in dirt. Even liquids are no problem for the combined wet-and-dry cleaner. It doesn't require much room for storage. Small and compact, the handy gadget slots in to the boot or vehicle interior, the garage or the storeroom.

Features & functions

- Handy, battery-powered vacuum cleaner for mobile use in cars, motorhomes, caravans, boats and home
- Maximum mobility with rechargeable 12 volt battery
- Can be recharged from 12 and 240 volts
- Easy to clean dust container and fabric filter
- Cleaning power: 400 mm water column

Motor	12 volts DC, 28,000 rpm
Battery	12 volts DC, 2.6 Ah
Operating time	Approx. 18 min ± 10%
Charging time	10 to 14 h (automatic cut-off)
Capacity	3.8 litres
Power consumption	Approx. 90 watts
Cleaning power	Approx. 400 mm water column (± 10%)
Operating temperature	0 °C to +40 °C
Material	Handle: ABS; Filter: polyester; Dust container: PP
Dimensions (W x H x D)	270 x 320 x 198 mm
Weight	2.15 kg
Scope of delivery	Vacuum cleaner, hose, attachments for upholstery, rugs and narrow gaps, carrying strap, mains adapter, 12 volt charging cable, operating instructions.

Product

PowerVac

Ref. No

PV-100



WAECO PerfectKitchen MCK-750

If something hot is what you need; this handy kettle, especially designed for operation in vehicles, provides you with a pot of tea, a cup of coffee or a mug of soup in no time at all. This robust gadget suits 12 volt operation. The automatic cut-off function stops it from overheating when empty and ensures safe and comfortable handling. An indispensable helper on board!



Capacity approx.	0.75 litres
Voltage	12 volts DC
Average power consumption	12 volts: 200 watts
Colour	Black/silver
Dimensions (W x H x D)	190 x 205 x 125 mm (incl. fixing kit)
Weight	0.8 kg
Test marks	e-approved (Automotive EMC Directive), complies with German Foodstuff and Consumer Goods Act (LMBG)
Scope of delivery	Fixing kit for wall or desk mounting
Quality features	Robust relay technology, switches off automatically when the boiling temperature has been reached or when there's no water in the kettle, status indication

Product

PerfectKitchen MCK-750, 12 volts

Ref. No

MCK-750-12/N

DOMETIC VACUUM SEALER

12/240 VOLT



The new lightweight, low profile Dometic Vacuum sealer keeps food fresh up to five times longer than refrigeration alone. It runs on both 12V DC and 240V AC power, ideal for home or on the road.

- 12/240 volt
- Keeps food fresh up to 5 times longer*
- Locks in flavour, colour and nutrition
- Eliminate freezer burn & wasted food
- For outdoor and indoor use
- Maximise fridge & freezer space
- Manual and automatic vacuum sealing
- **W380 x H83 x D152 mm**

Product	Ref. No
Vacuum sealer	VS-AC/DC



DOMETIC Vacuum sealer rolls

- Available in 8" and 11"
- 2 rolls x 3 m each
- BPA Free and food grade quality
- Fridge, freezer, microwave and simmer safe
- Maintains freshness and nutritional benefits

Product	Ref. No
8" Vacuum sealer rolls	VS-8ROLL
11" Vacuum sealer rolls	VS-11ROLL

* Various factors, including freshness of food prior to vacuum sealing, traces of contaminants, storage temperature and humidity may affect the storage life of food.

DOMETIC ORIGO 5100

This all rounder is not only an effective source of heat but also an excellent stove for cooking. Great for the caravan, boat or camping.



Burning time	approx 6 to 8 hours
Number of burners	1
Burner capacity	1500 watts per canister
Boiling time	approx. 10 minutes for 1 litre of water
Tank capacity	1.2 litres
Dimensions	Ø280x H290 mm
Weight	3 kg

Product	Ref. No
Dometic ORIGO 5100	OH5100



TRUMA LevelCheck

The practical LevelCheck uses LEDs for quick and reliable indication of measuring liquid gas. The measuring device is simply placed against the gas cylinder in a horizontal position.




Dimensions	W135 x H35 x D30 mm
Weight	approx. 100 g (incl. battery)
Power supply	9 volt battery

Product	Ref. No
Truma LevelCheck	50500-02



MILENCO

EUROPE'S LEADING MANUFACTURER OF AWARD WINNING CARAVAN PRODUCTS

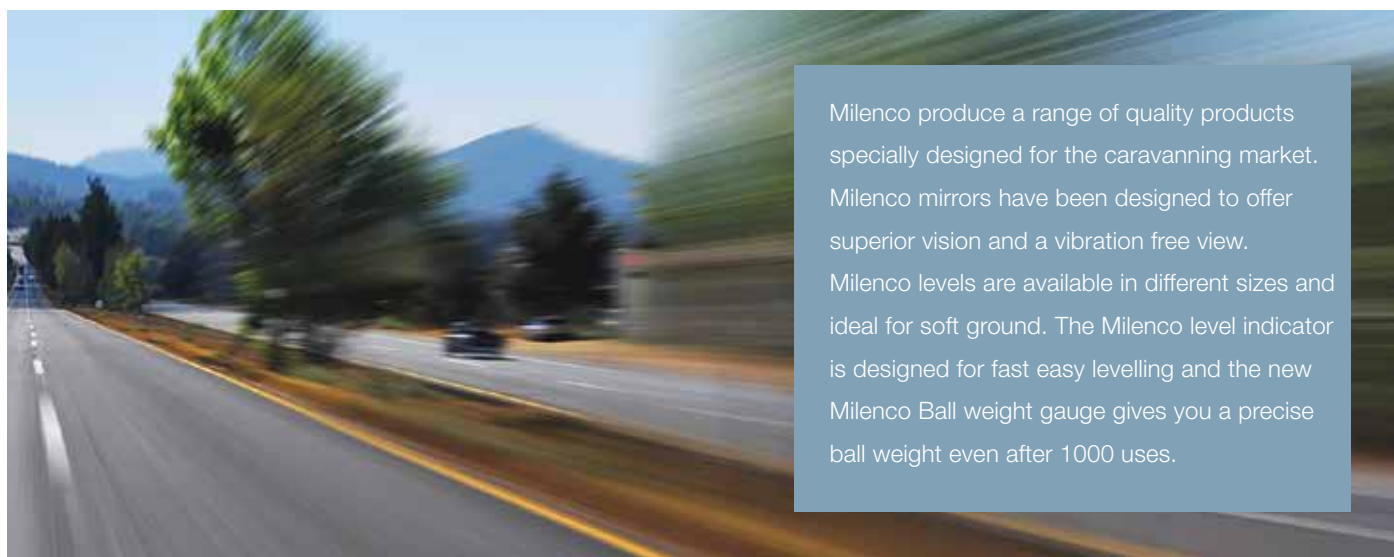

Milenco produce a range of quality products specially designed for the caravanning market. Milenco mirrors have been designed to offer superior vision and a vibration free view. Milenco levels are available in different sizes and ideal for soft ground. The Milenco level indicator is designed for fast easy levelling and the new Milenco Ball weight gauge gives you a precise ball weight even after 1000 uses.



MILENCO AERO EXTRA WIDE MIRRORS

The mirror head design (registered design) utilises airflow around your car to stabilise and balance the mirror head at speed. This mirror has been extensively tested at speeds up to 250 km/h (155 m/ph), to ensure that you get the best vision possible. This design also offers superior performance in high winds and the effect of passing large commercial vehicles has been minimised.

Product

Milenco Mirror Aero wide - pair

Ref. No

M-2899



MILENCO GRAND AERO EXTRA WIDE MIRRORS

The Grand aero mirror offers all the benefits of the original Aero mirror, plus the maximum view possible, combined with very high stability.

The head is the largest ever used on a caravan towing mirror and has been specifically designed to be extremely stable. The shape enables you to see far past your caravan and cars in all three lanes on the highway.

Product

Milenco Mirror Grand aero - pair

Ref. No

M-2912



MILENCO LEVEL INDICATOR GAUGE

Level indicator for Quattro and Triple levels. Use this clever gauge for fast and easy levelling. Simply place on the caravan floor to instantly see which step to use on your Milenco Triple or Quattro level for instant levelling.

Product

Milenco Level indicator gauge

Ref. No

M-3117



MILENCO LEVELS

MILENCO TRIPLE LEVEL



This is the tallest (160 mm) 3 step level ever made. The level incorporates lattice, high-grip upper tread surface. They pocket the wheel at every height eliminating the need for chocks. They also have a solid base to stop sinking on soft ground.

Capacity:

2000 kg per wheel.



MILENCO QUATTRO LEVEL



We are very proud of the light weight innovative (patent pending) registered design. This gets over all of the problems using conventional levels on soft ground, but more importantly, it's twice as high as conventional plastic levels, which are never quite high enough.

Capacity:

2000 kg per wheel.



MILENCO T1 MINI LEVEL



The Milenco T1 levels are lightweight with an intelligent design, featuring 50% base surface area and 50% top surface area. The Milenco levels are ideal to use on softer grounds or sand. Extra wide and heavy duty, the Milenco level incorporates a lattice and a high-grip upper tread surface, pocketing the wheel at every height.

Capacity:

1250 kg per wheel.



MILENCO T2 MIDI LEVEL



The Milenco T2 levels are lightweight with an intelligent design, featuring 50% base surface area and 50% top surface area. The Milenco levels are ideal to use on softer grounds or sand. Extra wide and heavy duty, the Milenco level incorporates a lattice and a high-grip upper tread surface, pocketing the wheel at every height.

Capacity:

1250 kg per wheel.



Product	Ref. No	Product	Ref. No	Product	Ref. No	Product	Ref. No
Milenco Level triple - pair	M-2936	Milenco Level quattro - pair	M-2615	Milenco Mini level - T1 pair	M-3896	Milenco Midi level - T2 pair	M-3902

MILENCO BALL WEIGHT GAUGE



Milenco Precision calibrated ball weight gauge has been manufactured using unique materials so its calibration remains accurate even after 1000 uses. The scale goes up to 400 kg enabling you to have a reliable and accurate reading, helping to ensure you travel safely.

Ideal for calculating the ball weight on:

- Single and twin axle caravans
- Camper trailers
- Off road camper vans/trailers
- Trailers
- Horse floats
- Boat trailers

MILENCO COMPACT WHEEL CLAMP

The Milenco Compact wheel clamp is a unique and innovative design with an integrated locking mechanism and winding handle. Simply turn the winding handle to clamp onto the wheel.

Fits wheels from 12" - 16" up to 225 tyre size in alloy or steel. Comes complete with adaptors to fit wheels with either small or large wheel nuts.

Fitted with superior quality lock and high security key system. A foam backing is on the wheel clamp to protect your alloy wheels.

- Supplied with a carry case
- 2 x high security keys

Weight	3.4 kg
Dimensions	W275 x H490 x D40 mm



1. Place Milenco Compact wheel clamp around wheel
2. Place on wheel nut (adaptors included)



3. Tighten handle
4. Lock & remove key



Product	Ref. No
Milenco Ball weight gauge	M-3155



Product	Ref. No
Milenco Compact wheel clamp	M-2745



DOMETIC BOX AWNINGS

NEW! Dometic PerfectWall & PerfectRoof Box awnings are compact and lightweight and come in various lengths to suit most RV, vehicle and camper applications. Engineered with extra strong arms and supports for optimal fabric tension and resistance against wind.

Available in manual and optional integrated 12 volt motor (with manual override) on some models.

SUPERIOR QUALITY FABRIC

Designed with UV resistant 3 ply polyester reinforced vinyl fabric with waterproof welded rope seams. The Dometic Box awnings are rot proof and can be put away damp without fear of damaging the fabric. Available in horizon grey and blue fabric colours, with white or anthracite grey casings.



Quality fixtures



Optimal fabric tension



Compact design



Optional LED strip available

Wall & roof mount manual or 12 volt retractable arms

- 12 volt or manual operation with telescopic crank
- Solid retractable arms to provide optimal tension & resistance against wind
- Fabric is 13 oz. 3-ply polyester reinforced vinyl in horizon blue and grey
- Corrosion resistant powder coated profile in white or anthracite grey



Horizon grey



Horizon blue



DOMETIC PerfectWall 1000

- Robust wall mounted awning
- Projection 2.5 m
- Plastic end caps
- 3 - 4 m lengths



DOMETIC PerfectRoof 2000

- Lightweight roof mounted awning
- Projection of 2.5 m
- Plastic end caps
- 3 - 4 m lengths



DOMETIC PerfectWall 1500

- Robust wall mounted awning
- Projection of 2 - 2.5 m
- Aluminium end caps
- 2.6 - 6 m lengths



DOMETIC PerfectRoof 2500

- Robust roof mounted awning
- Projection of 2.5 m
- Aluminium end caps
- 3.5 - 5.5 m lengths

COLOURS The colour in this chart should be used as a guide only. For exact fabric colour, see your Dometic dealer.

WAECO Spares



12 volt cable
CFX-35/40/50/65/65DZ &
CF-25/35/40/50/50DZ/60

80-T2-2000AG



12 volt cable
CF-18 only

80-T2-2000AI



12 volt cable
Suits CF-80/80DZ/110

80-T2-1500AG1



240 volt cable
Suits CFX & CF range

38-AU-2000B4



Hinge assembly
Suits CF-80/80DZ/110

028LOCKASA



Latch assembly
Suits CF-80/80DZ/110

028-HINGEASA



Lid lanyard
Suits CF-50/50DZ/60

005NYLONA'SA



Lid lanyard
Suits CF-80/80DZ/110

028NYLONA'SA



Light assembly
For CF-35 & CF-40 only

80-01026LGT



Light assembly
All CF models except
for CF-35 & CF-40

81-01980LGT



Charge cable
RAPS36 charge cable

80-T2-1500JL



12 volt cable
For thermoelectric models

80-T1-2800AA



240 volts cable
For thermoelectric models

38-AU-2000B1



Latch bungee
WCI Icebox, pair

WCI-2001



Latch front
WCI Icebox, pair

WCI-2002



Bung
With gasket, WCI Icebox

WCI-1007





Dometic Group is a customer-driven, world-leading provider of leisure products for the RV, automotive, truck and marine markets. We supply the industry and aftermarket with a complete range of air conditioners, refrigerators, awnings, cookers, sanitation systems, lighting, mobile power equipment, comfort and safety solutions, windows, doors and other equipment that make life more comfortable away from home.

Dometic Group supplies a wide range of workshop equipment for service and maintenance of built-in air conditioners. Dometic Group also provides specially designed refrigerators for hotel rooms, offices, wine storage and transport and storage of medical products. Our products are sold in almost 100 countries and are produced mainly in wholly-owned production facilities around the world.

AUSTRALIA

Dometic Australia, Queensland 1

1 John Duncan Court
Varsity Lakes QLD 4227
Phone: +61 (0)7 5507 6000
Fax: +61 (0)7 5507 6001

Dometic Australia, Queensland 2

2/129 South Pine Road
Brendale QLD 4500
Phone: +61 (0)7 3205 7599
Fax: +61 (0)7 3881 1409

Dometic Australia, Victoria

Bldg 3B, Clayton Business Park
1508 Centre Road, Clayton VIC 3168
Phone: +61 (0)3 9239 1000
Fax: +61 (0)3 9239 1099

Dometic Australia, Western Australia

12 Prosperity Avenue
Wangara WA 6065
Phone: +61 (0)8 9303 3555
Fax: +61 (0)8 9303 3577

FREECALL: 1800 21 21 21

E-mail: sales@dometic.com.au
Web: www.dometic.com.au

Your retailer: