

ROKK™
WIRELESS.

Nano 10W.

SC-CW-11F

Nano 10W is our smallest wireless charging mount. It squeezes big features into a tiny package.

Designed to be installed where space is at a premium, Nano 10W holds and wirelessly charges your phone at the same time!

The ultra-compact design can be installed and used in any orientation, unlocking new charging possibilities. Now you can keep your phone within reach, charged, and ready to go.

- 10W fast charge
- IPX6 waterproof
- Qi Certified
- 12/24V
- Instant charging
- Mount and charge
- Works with phone cases
- Single handed docking
- Outdoor-ready grip
- Fits all phones



Our new upgraded 10W chargers are up to 60% faster and have been designed for the latest generation of power-hungry devices and apps. Nano is compatible with all wireless charging enabled phones of all sizes from all major brands. Charging is also possible through non-metallic, waterproof cases.



Electrical Information:

Input voltage range	10-30V DC (12/24V system)
Input current max	2A
Output power max	10W (9V, 1.1A)
Input power draw	< 0.2W
Waterproof rating	IPX6 front and back

Nano 10W is at home in coastal and freshwater. If you require a wireless phone charging mount for rough conditions, we recommend ROKK Wireless – Active 10W or Edge 10W.

Technical Information




Input voltage range	10-30V DC (12/24V system)
Input current max	2A
Output power max	10W (9V, 1.1A)
Standby power draw	< 0.2W
Waterproof rating	IPX6 front and back
Certifications	Qi, CE, UKCA, FCC, IC, RoHS, UNECE R10 E24, RCM, PSE

Part List


		
ROKK Wireless Nano	Installation Jig	No 4 x 3/4" (18mm) Self tapping screw
x1	x1	x4

Tools Required

	
Pozl Screwdriver	Option A: 10 mm (0.39") Drill bit
	
Drill bit (for pilot holes) 2mm (5/64") 2.5mm (3/32")	Option B: 22mm (0.86") Hole saw

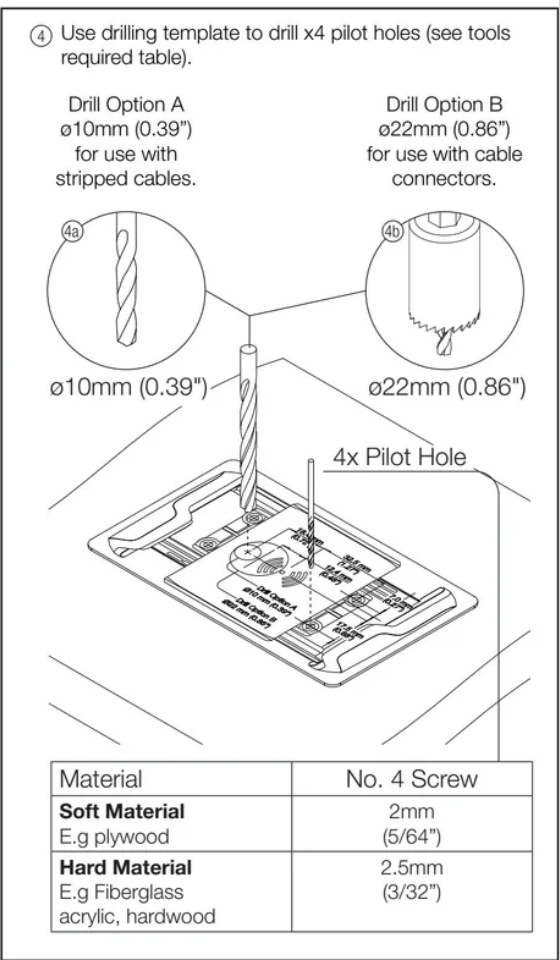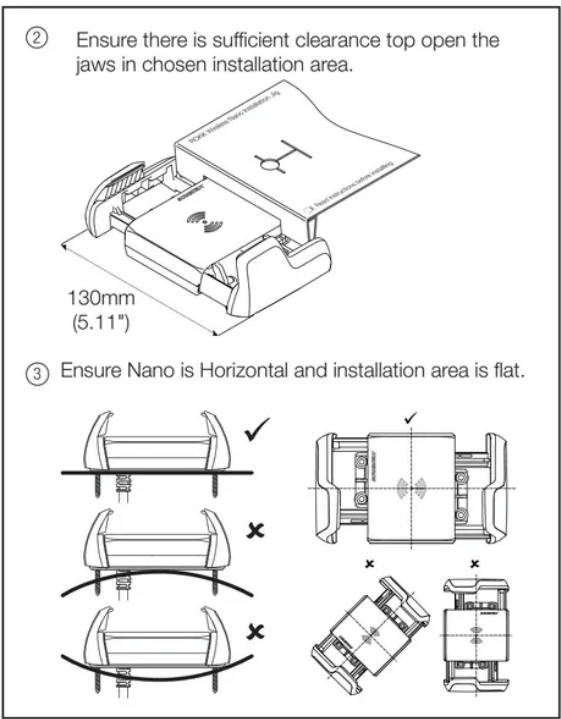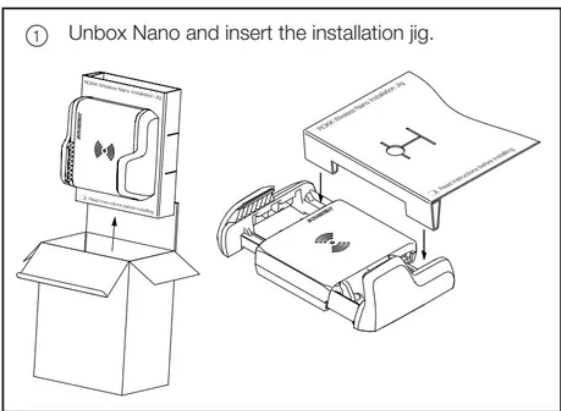

SCANSTRUT

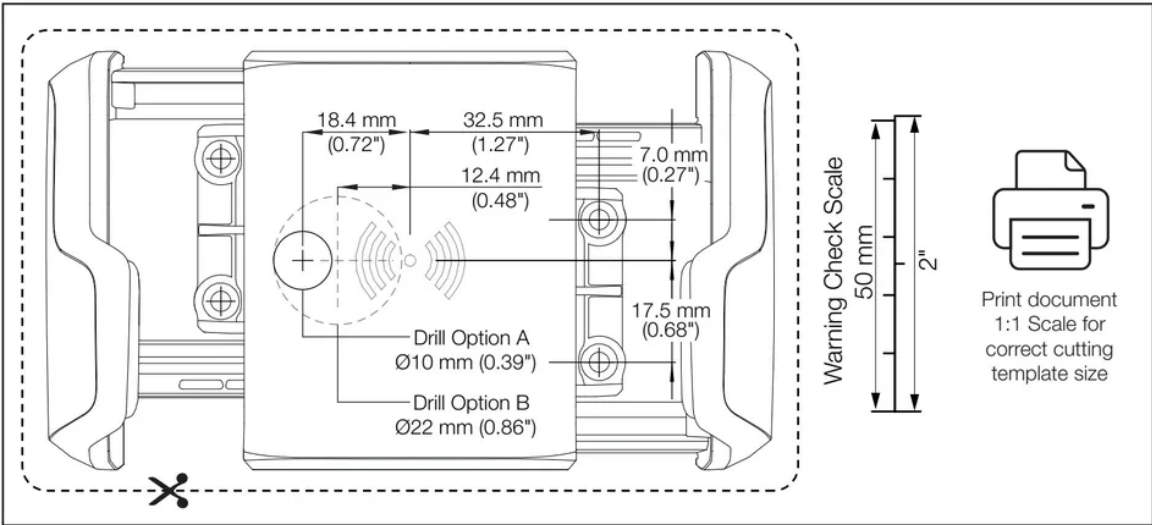

IN EXTREME USAGE ENVIRONMENTS PERFORMANCE MAY VARY. This product is designed to securely mount phones under normal usage conditions. The end-user is entirely responsible for conditions in which their device is used. See WARRANTY section for further details. Scanstrut recommends installation is carried out by a qualified electrician. No liability is accepted for damage and/or injury caused by incorrect installation. WARNING: This product is to be connected to a 12V DC or 24V DC battery power source only. The power supply must be switched off before installation. An appropriate fuse or circuit breaker must be used between the battery / power source and this product. Check for correct polarity of all wiring before switching the power on. This product may contain high voltages. Do not tamper with the product. This product is NOT approved for use in hazardous/flammable atmospheres. Do NOT install in a hazardous/flammable atmosphere e.g. engine room. Before drilling any holes, ensure the area behind the mounting location is clear of wires, fuel and all other hazardous objects. Ensure any holes cut will not significantly weaken the structure of the mounting surface. If the product needs to be mounted outside, it must be mounted in a location safely above the waterline, where it is not at risk of being submerged. Full strength not achieved until product is installed	CAUTION: The product is designed specifically for the charging of Qi compatible devices. The cable must be retained and not interfere with mechanical systems. This product contains no user serviceable components. Do NOT attempt to repair or alter the product in any way. This product will charge through non-metallic phone cases up to ~3mm thick. Phone cases may alter overall charge performance. When used in a very high/low ambient temperature/direct or prolonged sunlight the product may temporarily shut down, this is a safety feature of the electronics. The IP rating is only valid if correctly installed as per these instructions and on a perfectly flat, non-porous, smooth surface. When selecting a mounting location, avoid places exposed to heat-radiating appliances and poorly ventilated areas. EMC INSTALLATION GUIDELINES: Scanstrut products conform to Electromagnetic Compatibility (EMC) regulations, to ensure that electromagnetic interference between equipment is minimised. Correct installation is required to ensure that electromagnetic interference is kept to a minimum. WIRING: When extending the cable from battery/power source to the product, ensure there is consistently a minimum of 10V being provided to the product. A wire gauge of 18AWG (0.82mm²) is recommended for any length of cable extension. The electrical schematic is to illustrate how the product should be connected to a 12V DC or 24V DC battery/power supply.	ENVIRONMENTAL PROTECTION: Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice. IMPORTANT: Scanstrut Ltd. accepts no responsibility for any injuries or other damages arising from the use of their products in any circumstances. WARRANTY: A 2 year, non-transferable warranty covers this Scanstrut product only and not any devices that are mounted in it or on it. No warranty is given for users' devices and users expose their devices to hazards, known or unknown, at their own risk.
--	--	--

SCANSTRUT®