



WASHDOWN PUMP KIT

FEATURES & BENEFITS

- 6M UV-protected Coiled Hose Coil
- 2M Inlet Hose
- Easy to use, store, and carry on
- Adjustable sprayer
- Built-in by pass valve
- Smooth flowing
- Quiet Operation
- 16 AWG, 4.5" long Leads



PUMP

- Liquid temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet(1.8 m) suction lift
- Max Pressure**
70 PSI (4.8 BAR)
- Weight**
11 lbs (5 kg)

Standard Accessories



More details and other optional accessories please refer to page 87-88

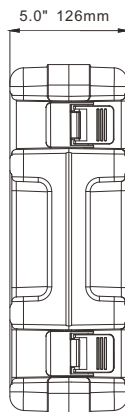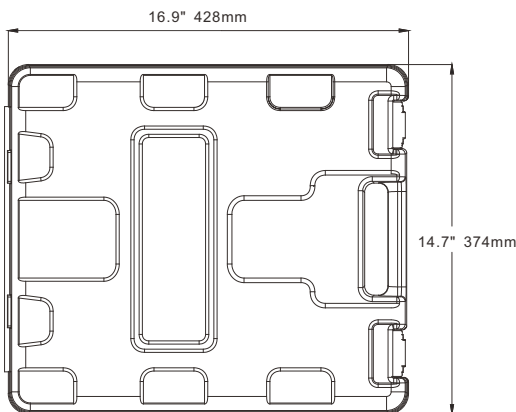

Color Box

STANDARD PUMP CONFIGURATIONS

| Model | Voltage | Open Flow (GPM/LPM) | Control Type | Max Draw(A) | Shut-off Pressure (PSI/BAR) | Valves | Diaphragm | Ports | Wire Connections |
|------------------|---------|---------------------|------------------|-------------|-----------------------------|--------|------------|--------------|------------------|
| SFWP1-045-070-41 | 12V | 4.5 / 17.0 | Demand & By pass | 17.0 | 70 / 4.8 | EPDM | Santoprene | Quick attach | 2-Pin/Leads |