



NRXD 15 | 20 | 30 COMPACT DRAWER REFRIGERATORS

Built on the advanced NRX platform, the NRXD Series offers a powerful, efficient refrigeration solution for smaller and more confined spaces onboard, in 15L, 20L and 30L capacity

➤ DOMETIC

SMALL PLACE COOL SPACE

The Dometic NRXD 15, 20 and 30 brings flexible refrigeration to compact marine spaces. With three capacities and a choice of front finishes, the range gives boat builders and owners practical cold storage without compromising onboard layout.

Each model can be installed as a standalone refrigerator or combined with the NRXD 50 and 60 series. This modular approach creates greater freedom to configure refrigeration around the vessel while maintaining a consistent, integrated look.

Benefits with NRXD 15 | 20 | 30

- Self-locking drawer stays securely open at full extension, providing easy access while the vessel is in motion.
- Elegant front panel and full-width handle combine clean integration with easy access from any angle.
- Energy-efficient Dometic compressor switches between fresh-food and freezer modes to suit changing storage needs.
- Flush-mounted control panel with integrated LED lighting ensures simple operation, even in low-light conditions.
- Modular installation frame supports standard or flush mounting for seamless integration into the surrounding interior.

Refrigeration technology	High-efficiency compressor cooling
Cooling functions	Refrigerator or freezer operation
Temperature Settings	3 refrigerator cooling levels (approx. 7°C, 4°C, 2°C) plus freezer mode down to -12°C
Cooling capacity range	15 L, 20 L and 30 L models
Refrigerant	R600a
Power supply	12 / 24 V DC
Control interface	Integrated LED display with push-button controls
Door options	Black plastic White plastic SUS316 Stainless steel
Mounting options	Standard-mount Flush-mount frame options



1. Self-Locking System

Holds the drawer securely at full extension for easier access, even while under way.



2. Removable Compressor

Position the compressor up to 1.5 m away to free valuable installation space.




3. Freezing Capability

Switch easily between fresh-food and freezer modes to suit changing storage needs.



4. Flexible Storage Organisation

Configurable dividers organise food and drinks efficiently while helping keep contents secure.

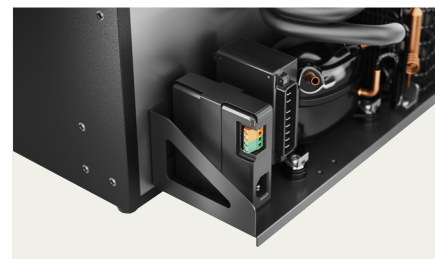

5. DPS-R Integration

Optional DPS-R integration enables operation from an AC mains supply when required.



6. Intuitive Control Panel

Select the cooling mode and temperature quickly using clear, flush-mounted LED controls.

SMALL PLACE COOL SPACE

White Finish



Black Finish



Stainless Steel Finish



MODEL	NRXD 15C	NRXD 15S	NRXD 20C	NRXD 20S	NRXD 30C	NRXD 30S
Material / finish	Frameless door with black or white plastic front and black full-width handle	Frameless door with SUS316 stainless-steel front and stainless-steel handle	Frameless door with black or white plastic front and black full-width handle	Frameless door with SUS316 stainless-steel front and stainless-steel handle	Frameless door with black or white plastic front and black full-width handle	Frameless door with SUS316 stainless-steel front and stainless-steel handle
Total capacity	15 L		20 L		30 L	
Connection	12/24 V DC					
Cooling	Refrigerator and freezer					
Refrigerator settings	Approx. 7°C / 4°C / 2°C					
Freezer mode	-10°C					
Intended ambient temperature use	+16°C to +43°C					
Refrigerant	R600a, 12 g		R600a, 13 g		R600a, 17 g	
Approx. DC energy consumption at 4°C	0.77 Ah/h**		0.80 Ah/h**		0.84 Ah/h**	
Noise emission, refrigerator mode	40.8 dB(A)				41.6 dB(A)	
Dimensions W × H × D	380 × 250 × 510 mm		440 × 250 × 564 mm		440 × 250 × 730 mm	
Weight	11.80kg	12.00kg	13.40kg	13.60kg	15.70kg	16kg
Black SKU	9630002168	-	9630002172	-	9630002182	-
White SKU	9630002266	-	9630002173	-	9630002269	-
Stainless Steel	-	9630002169	—	9630002174	-	9630002183
Technical Drawings	