


Product: In-line Check Valve

Models: 340-000/001, 1/2" [13mm] Barb OEM/Aftermarket

Caution: Do not use for Water Heaters

Technical Specifications

Cracking Pressure: 1 psi [.1 bar]
Max. Pressure: 100 psi [6.9 bar]
Overall Dimensions: 4-1/4" x 1-5/8" [108 mm x 42 mm]
Temperature Limits: 34°F - 120°F [1°C - 49°C]
Fitting Configuration: 1/2" x 1" [13 x 25mm] Straight Barb
Materials: Nylon, EPDM. All materials are NSF Listed.

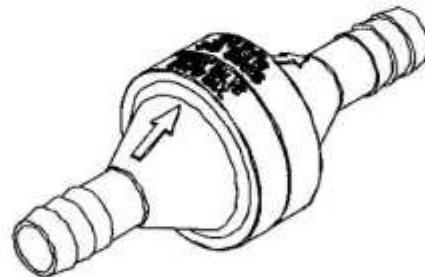

Installation

1. Arrow on body must be pointed in the same direction as the flow.
2. Do not use with fluids that contain particulate matter.
3. Be sure connections are secured with properly sized hose clamps.
4. Make sure all connections are in accordance with application.
5. Check for leaks after installation.



SHURflo reserves the right to update specifications, prices, or make substitution

SHURflo, LLC Headquarters
5900 Katella Ave.
Cypress, CA 90630
Phone (562) 795-5200 Toll Free(800) 854-3218
FAX (562) 795-7554

SHURflo, LLC East
52748 Park Six Court
Elkhart, IN 46514-5427
Phone (562) 795-5200 Toll Free (800) 854-3218
FAX (574) 264-2169
© 1999 All rights reserved

SHURflo Europe, Middle East, Africa
Pentair Water Belgium bvba,
Industriepark Wolfslee, Toekomstlaan 30
B-2200 Herentals, Belgium
Phone +32-14-283500 Fax +32-14-283506