

DS21A-P / DS21A-P-BLK* / DS21A-S
 DS21B-P / DS21B-P-BLK* / DS21B-S
 DS16-P / DS16-P-BLK* / DS16-S
 DS6-P / DS6-P-BLK*


20-09-2019 (Issue 3)

Installation Instructions

Parts List

	Shell	x1
	Base	x1
	Gasket	x1
	M4X10 Bolt - (Black*)	x1
	No. 4X16 self tapping screw	x4
	DS21A Bungs	x4
	DS21B Bungs	x4
	DS16 Bungs	x4
	DS6 Bungs	x6

Tools Required

	Pozi Screwdriver
	Silicone
	DS21 - $\phi 21\text{mm}$ (0.82") DS16 - $\phi 16\text{mm}$ (0.62") DS6 - $\phi 6\text{mm}$ (0.23") Hole Saw/ Drill Bit
	$\phi 2\text{mm}$ (5/64") / 2.5mm (3/32") Drill Bit

① Choose bung closest to cable ϕ .

DE - Wähle Dichtung nahe dem Kabel ϕ .
 IT - Scegliere il passafili adatto al ϕ del cavo.
 ES - Elja el tapón con el diámetro más parecido al cable.
 FR - Choisissez le joint le plus proche du diamètre du câble.

1a

Tip: freeze before drilling

-18°C

$\phi = +1.5\text{mm}$

4mm (0.16")

1b


②

③ 6mm (0.23")
16mm (0.62")
21mm (0.82")

④

Suggested pilot holes:

Material	No. 4 Screw
Soft Material e.g. plywood	2mm (5/64")
Hard Material e.g. fiberglass, acrylic, hardwoods	2.5mm (3/32")

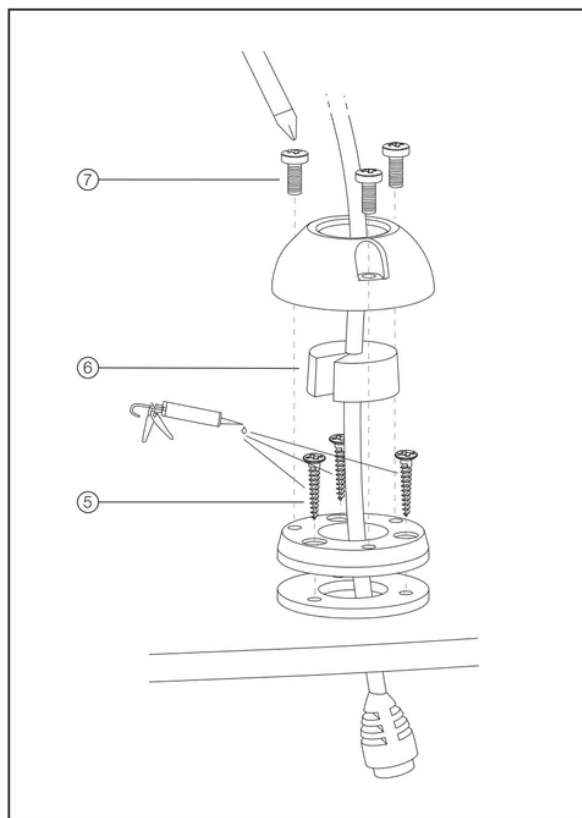

Share your installation with us.



UK & International
 +44 (0)1392 531280
 sales@scanstrut.com



For further installation
 and warranty information
 please visit:
 www.scanstrut.com

USA
 +1 860 308 1416
 usasales@scanstrut.com

SCANSTRUT

Cable Seals

For help & information
email: sales@scanstrut.com
tel: +44 (0) 1392 531280

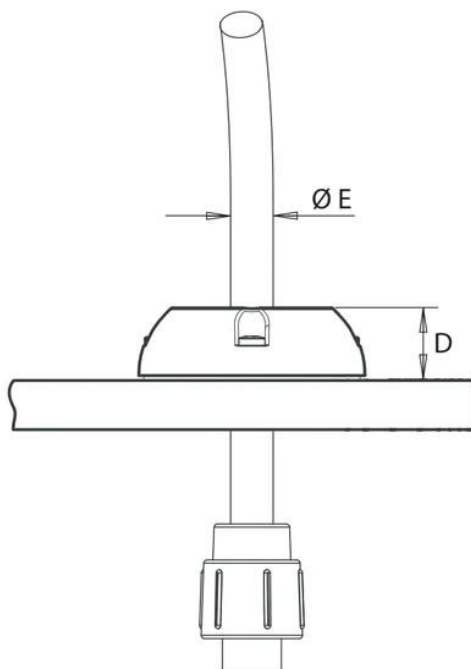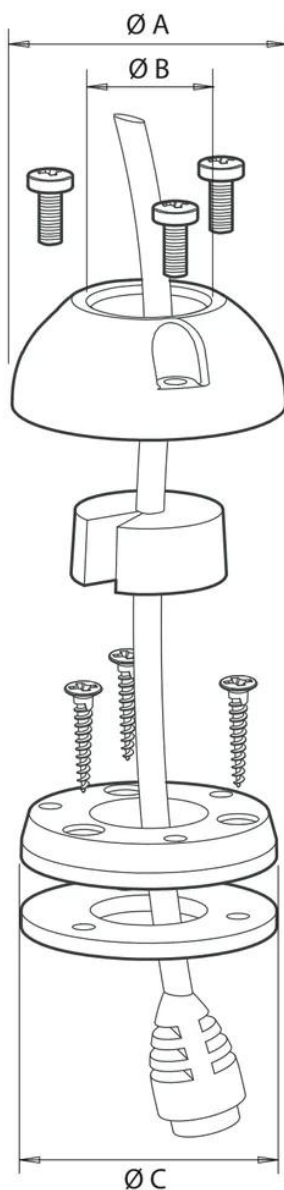

	A mm / inches	B mm / inches	C mm / inches	D mm / inches	E mm / inches
DS6	30/1.18	6/0.24	27.0/1.06	17/0.67	2-6/0.08-0.24
DS16	39/1.53	16/0.63	36.5/1.44	19/0.75	2-8/0.08-0.31
DS21A	49/1.93	21/0.83	45.7/1.8	20.5/0.81	4-9/0.17-0.31
DS21B	49/1.93	21/0.83	45.7/1.8	20.5/0.81	9-14/0.35-0.55
DS30	59/2.32	30/1.18	56/2.2	20.5/0.81	9-14/0.35-0.55
DS40	69/2.72	40/1.57	66/2.6	21.7/0.85	12-15/0.4-0.59

Please note: When ordering your Deck Seal please specify -S for Stainless steel and -P for Plastic.
e.g. DS16-P

Bung dimensions for different models (included in the package)

	2/0.08	3/0.12	4/0.16	5/0.20	6/0.24	7/0.28	8/0.31	9/0.35	10/0.39	11/0.43	12/0.46	13/0.51	NO HOLE
DS6	✓	✓	✓	✓	✓								✓
DS16		✓	✓			✓							✓
DS21A			✓	✓		✓							✓
DS21B							✓			✓		✓	✓
DS30							✓		✓			✓	✓
DS40											✓		✓

Please note: ✓ = one bung

SCANSTRUT